




RIV 3130

Three-piece fitting
male x straight hose-connection
metal seat

Tech drawings and tables

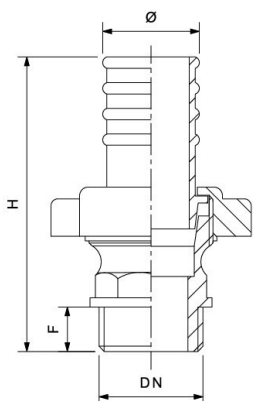


DNxØ	Code	H	F	PN	KG	P/box
3/8" x 15	033130000134	56	9	10	0,078	25
1/2" x 15	033130000165	57	10	10	0,086	20
1/2" x 18	033130000167	65	10	10	0,102	15
1/2" x 20	033130000168	64	10	10	0,101	15
3/4" x 20	033130000210	65	11	10	0,124	15
3/4" x 25	033130000213	77	10	10	0,156	15
1" x 25	033130000247	83	13	10	0,184	15
1" x 30	033130000250	94	13	10	0,249	10
1" x 32	033130000251	95	13	10	0,279	10
1"1/4 x 30	033130000290	96	13	10	0,312	10
1"1/4 x 32	033130000291	96	13	10	0,309	10
1"1/4 x 35	033130000292	104	15	10	0,404	8
1"1/4 x 40	033130000295	111	15	10	0,470	6
1"1/2 x 40	033130000332	110	16	10	0,475	6
2" x 50	033130000371	126	16	10	0,812	6
2" x 60	033130000373	140	20	10	1,123	5
2"1/2 x 60	033130000417	134	18	10	1,154	5

Technical data

Art. 3100

Materials

1 Body Brass CW617N



Connections

ISO 228/1

Limit

-10°C (without liquid) +100°C

Notes

The max. working pressure (PN) means at a room temperature of about 23°C.