




RIV 4356

Ball valve M/F
full bore
T-Lock brass sealing tamperproof cap and cover cap


Tech drawings and tables

DN	Code	Ø	H	S	F	CH1	PN	KG	P/box
1/2"	024356000004	15	48	66	16	16	64	0,234	10
3/4"	024356000005	20	54	76	17,5	16	40	0,357	10
1"	024356000007	25	58	91	21	16	40	0,567	10
1"1/4	024356000008	32	71	101	22,5	16	40	0,924	6
1"1/2	024356000009	40	79	113	22,5	16	40	1,195	4
2"	024356000011	50	87	134	26,5	16	40	1,993	4



Technical data

Art. 4190

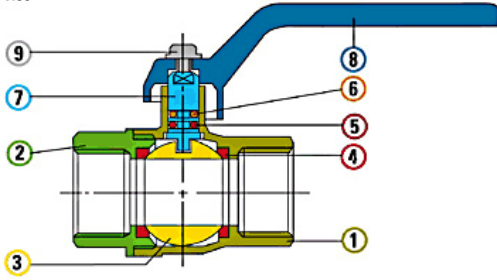

Materials


1	Body	Brass	CW617N	Nickel-plated
2	Body end	Brass	CW617N	Nickel-plated
3	Ball	Brass	CW617N	Chrome-plated
4	Seats	P.T.F.E.		
5	O-Ring	FKM		
6	O-Ring	NBR		
7	Stem	Brass	CW614N	
8	Lever	Aluminium		Green
9	Screw	Steel		Zinc-plated

Connections F/F: ISO 7/1Rp (parallel), ISO 7/1Rc (tapered), ANSI B1.20.1 (NPT) - M/F: male ISO 7/1R (tapered), female ISO 7/1Rp (parallel) - MM: ISO 7/1R (tapered)


Limit -20°C (without liquid) +150°C

Notes The max.working pressure (PN) means at a room temperature of about 23°C.

Pressure Loss Chart

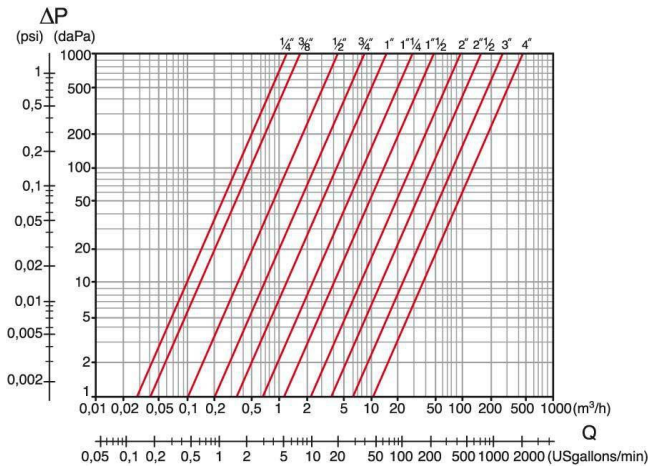

Temperature/Pressure

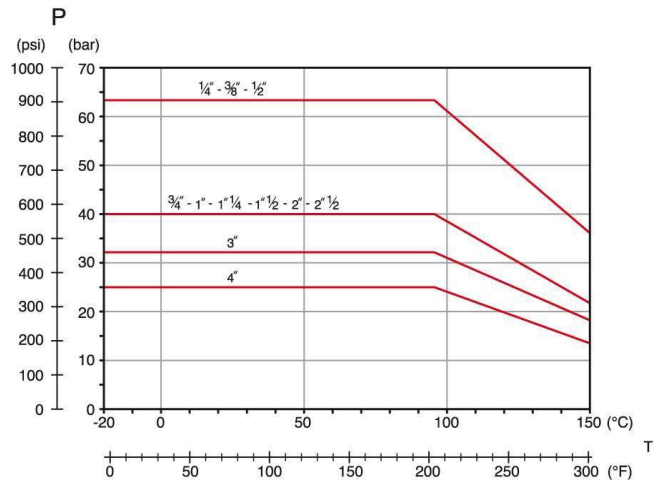

Kv & Cv Coefficients

Size	Kv	Cv
1/4"	4,1	4,7
3/8"	6,3	7,3
1/2"	15,5	17,9
3/4"	31,0	36,0
1"	52,0	60,0
1 1/4"	100,0	116,0
1 1/2"	180,0	206,0
2"	350,0	405,0
2 1/2"	350,0	671,0
3"	1000,0	1157,0
4"	1550,0	1793,0

Approvals



RIV Rubinetterie Italiane Velatta S.p.A. - Via delle Acacie, 8 Zona Industriale D4 - 28075 GRIGNASCO (NO) - ITALY
Tel +39 0163 4151 Fax +39 0163 411914 E-mail riv-vg@riv-vg.com Web www.riv-vg.com

Capitale sociale € 516.000 i.v. - Reg. Imprese di Novara N° 00469610026 - R.E.A. di Novara N° 170397
Numero Meccanografico NO009263 - Codice Fiscale: 00469610026 - Partita IVA: IT 01399720034

